


3-718-R006 / 3-718-R036 / 3-718-R002

Manifolds

For gas handling on several gas compartments at the same time

The DILO manifolds help to significantly increase the efficiency of gas handling with service carts in the GIS unit production or at utility companies.

The standard DILO manifolds are equipped with three DN20 connections as well as a DN20 or DN40 connection to the service cart. Thus, it is possible to recover, to evacuate or to fill three gas compartments at the same time.

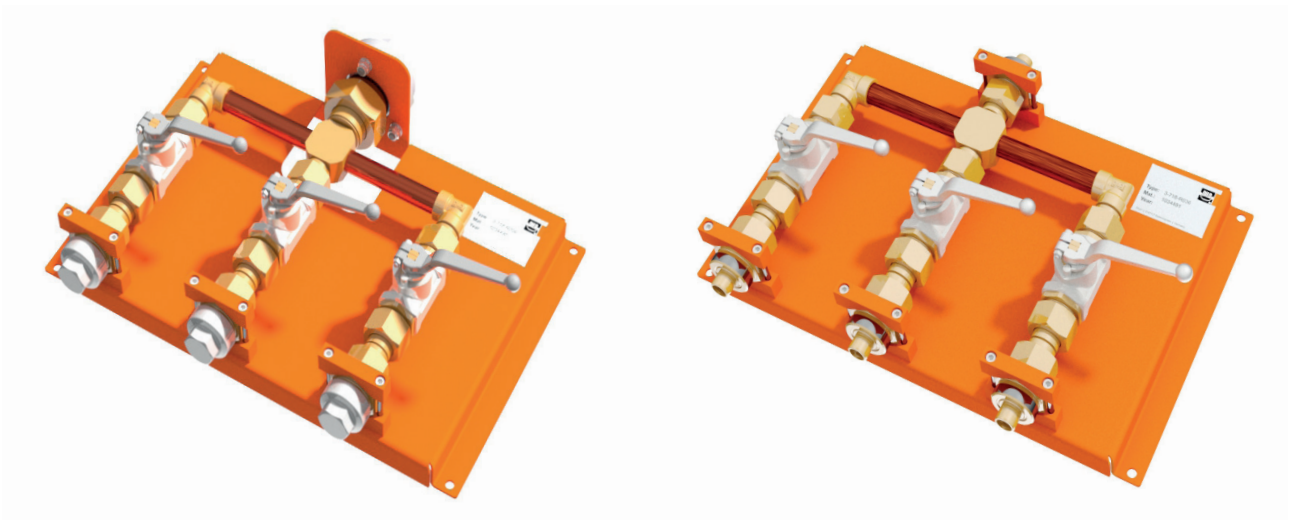


3 x DN20 / 1 x DN40
Order no.: 3-718-R006

4 x DN20
Order no.: 3-718-R036

- Gas-tight version
- Self-closing couplings
- Ball valves individually lockable
- Suitable for wall assembly

Upon request manifolds with solenoid valves as well as standalone panels are available.

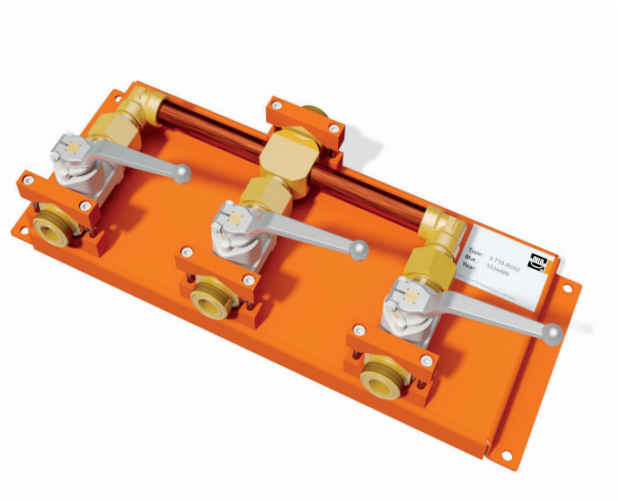

4 x DN20 without couplings
Order no.: 3-718-R002

Packing:

| | |
|-------------------------------------|---------------------|
| Packing for 3-718-R002 / 3-718-R006 | 3-775-R013-C |
| Packing for 3-718-R036 | 3-775-R014-C |