

B195R01 / R02

Weighing unit for “SF₆ Monitoring Manager”

Mobile as cylinder cart

B195R01

With thermal transfer label printer


B195R02

Without thermal transfer label printer

This weighing unit is a useful tool for the stock management of SF₆ cylinders in connection with the “SF₆ Monitoring Manager” database software. The quantity of SF₆ stored in gas bottles is precisely determined by means of electronic scales, incoming and outgoing gas vessels are identified by means of the integrated barcode scanner. The required barcode labels can be printed on site with the label printer (only B195R01).

Gas quantities being filled or withdrawn are registered by the weighing unit and are allocated to the corresponding storage location or customer location via the computer tablet. This unit also enables the registration of the gas quality (e. g. new gas or reuse gas). In filling mode any gas quantities can be withdrawn from the bottle and transferred to other gas vessels. Its difference is immediately registered in the database.

For detailed information on the “SF₆ Monitoring Manager” database software please see our B195R10 / R11 data sheet.

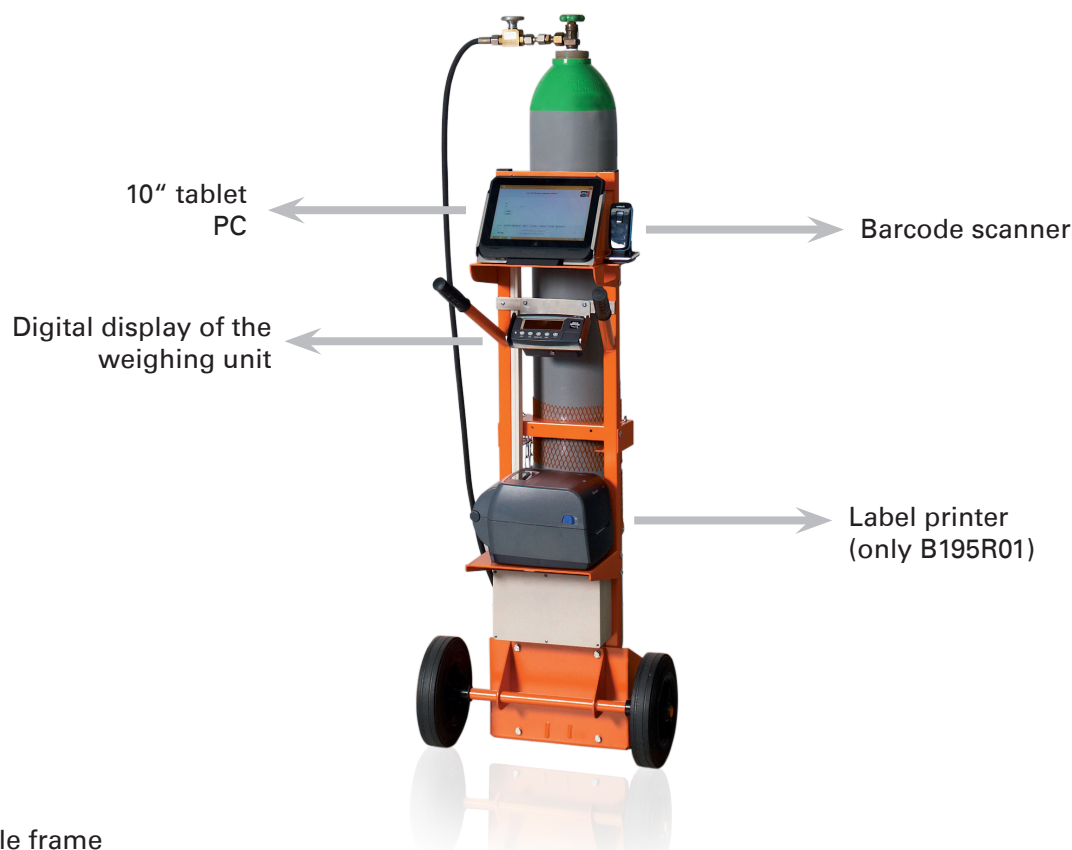

- Stable frame
- Electronic weighing unit: digit increment 10 g, accuracy ± 20 g
- Network independent by Li-Ion battery operation
- 10" tablet computer with database connection via LAN/WLAN
- 2D capable cordless barcode scanner with Bluetooth interface

B195R01 / R02

Weighing unit for “SF₆ Monitoring Manager”

B195R01 / R02

Weighing unit for “SF₆ Monitoring Manager”

Technical data:

| |
|---|
| Dimensions: L 650 mm, W 570 mm, H 1.320 mm |
| Dimensions of weighing platform: L 300 mm, W 310 mm |
| Weight: 45 kg |
| Operating voltage: 100 - 240 V / 50 - 60 Hz alternating current (for battery charger) |

Standard equipment:

| |
|--|
| 10" tablet computer with database connection via LAN/WLAN |
| Only for B195R01: Thermal transfer printer for label width to 100 mm, mounting plate included in the scope of supply |
| Electronic weighing unit |
| Battery operation with Li-Ion battery |
| 2D capable cordless barcode scanner with Bluetooth interface |
| Paint: orange (RAL 2004) |
| 2 operating manuals in German, English or French |

Important note:

The device can only be operated in connection with the “SF₆ Monitoring Manager” software.

SF₆ Monitoring Manager:

Web-based data software for SF₆ gas monitoring (cloud solution or installation on internal server)

| | |
|--|----------------|
| Initial installation | B195R10 |
| Annual user fee including updates and online support | B195R11 |

Optional accessories at an extra charge:

| | |
|---------------------------------------|--------------------|
| Additional operating manual on CD-ROM | 6-0004-R213 |
|---------------------------------------|--------------------|

Packing:

| | |
|-------------------------------|---------------------|
| Packing for B195R01 / B195R02 | 3-262-R006-C |
|-------------------------------|---------------------|